




[http://www.cartft.com/catalog/il/2354]



829.00 EUR incl. 19% VAT, plus shipping

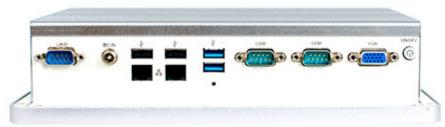

- 10.1" 400 nits high brightness TFT LCD with LED backlight
- 10-points Multi Capacitive Touch
- · Cable less, Streamlined enclosure for highly efficient heat dissipation Enclosed in robust aluminum casing
- · Edge-to-edge narrow bezel design and Fanless cooling system
- Design for easy Wall mount, Panel Mount, VESA Mount installation
- A true Flat, easy-to-clean front surface with edge-to-edge design
- · Lockable USB device bracket supported
- Front bezel meets IP65-rated protection
- 9-28V DC-input Support, with EOS, OVP design

Jetway HHPC101SC-FP1900B Flat-Panel Fanless Panel PC provides outstanding outlook with industrial-grade quality for comprehensive industrial markets, such as retails, wholesales, hospitality, hospital or meeting room registration, logistics, self-service kiosk, residential automation and digital signage.

Jetway HPC101SC-FP1900B Flat-Panel Fanless Panel PC is designed with 10-points Multi capacitive type touch screen. High brightness TFT LCD panel with LED backlight are equipped with this model. Cable-free design is easy for the HDD and memory installation. Streamlined enclosure with narrow bezel design.

Jetway HPC101SC-FP1900B Flat-Panel Fanless Panel PC is designed with a true flat, easy-to-clean front surface with edge-to-edge design. It is designed mounting clips for easy Wall mount, Panel Mount, VESA Mount installation.

Front bezel meets IP65-rated & NEMA 4 protection. Welcome to use Jetway Flat-Panel Panel PC.

| Display            |  |
|--------------------|--|
| Front Bezel        | - IP65, NEMA 4 rugged protection, Full planar metal border |
| Display Type       | - 10.1" With LED Backlight                                 |
| Brightness (cd/m²) | – 400 nits   |



## Jetway HPC101SC-FP1900B Panel-PC (10.1" 1280x800 PCAP Touchscreen, Intel N2807, 4GB RAM) [IP65/NEMA4 Front]

[http://www.cartft.com/catalog/il/2354]

| Display Color          | - 16.2M  |
|------------------------|--|
| Resolution             | - 1280 x 800 @ 60Hz  |
| Viewing Angle (H/V)    | - 170°/170°  |
| Pixel Pitch            | - 0.1695 x 0.1695 mm   |
| Aspect Ratio           | - 16:10  |
| Contrast Ratio         | - 800:1  |
| Response Time          | - 30 ms  |
| Touch Screen           |  |
| Туре                   | projected capacitive type  |
| Active Range           | – 257.10 x 159.66mm ±0.2mm   |
| Transparency           |  |
| Surface Hardness       | _ ■6H (JIS-5400)   |
| Glass haze value       | -■3%   |
|                        |  |
| CASE Panel Material    | – Aluminum   |
| Case Material          | - Aurninum<br>- Iron   |
|                        |  |
| Color                  | - Silver + white   |
| Coating Requirement    | - Spray Paint  |
| Main System            |  |
| CPU                    | - Intel® Bay Trail-D J1900 2.0GHz/QC                                       |
| RAM                    | - 4G 1333MHz DDR3L SAMSUNG DRAM  |
| BIOS                   | - 64MB SPI Flash ROM   |
|                        | - 1* 2.5″ SATA bay   |
| Storage                | - 1* M.2 connector (2242/2260/2280)  |
| Watchdog Timer         | - 256 levels, 0~255 sec.   |
| OS Support             | - Windows 7 / 8.1 / 10 / Linux (Option)                                    |
|                        | - vviidows 7 / 0.1 / 10 / Elitux (Option)                                  |
| I/O Connector          | - 2 * USB3.0   |
|                        | - 2 * USB2.0   |
|                        | - 1 * 8bit GPIO  |
| WO Parts and Quitalian | - 2 * R\$232/422/485   |
| I/O Ports and Switches | – 1 * VGA  |
|                        | - 2 * LAN (INTEL I211AT Gigabit LAN)                                       |
|                        | <ul><li>1 * Locking Jack 9~28V DC input</li><li>1 * Power button</li></ul> |
|                        | - 1 Power button   |
| Expansion Interface    | A + POLE wisi and (a) WELL COME  |
| Expansion              | - 1 * PCI-E mini card for WIFI or 3G/4G                                    |
| Power                  |  |
| Power Input            | - Supports 9-28V DC Power in with over current protection fuse             |
| David Caranasi'        | - Provides 100~240V AC-DC 12V, 60W power adapter                           |
| Power Consumption      | - 21W  |
| Dimension              |  |
| Case Dimensions        | - 258.96*176.60*59.7mm   |
| Certifications         |  |
| Certifications         | - CE, FCC, IP65(Front)   |
| Environment            |  |
|                        |  |



## Jetway HPC101SC-FP1900B Panel-PC (10.1" 1280x800 PCAP Touchscreen, Intel N2807, 4GB RAM) [IP65/NEMA4 Front]

[http://www.cartft.com/catalog/il/2354]

| Temperature | - Operating Temperature: -10 ~ 60° C (with W.T. DRAM/HDD in airflow condition) - Storage Temperature: -20 ~ 85° C |  |
|-------------|---|--|
| Shock       | <ul><li>Operating: 15G■11ms duration</li></ul>  |  |
| Vibration   | Operating: 5~500Hz/1 Grms   |  |
| Warranty    |   |  |
| Warranty    | - 2 Years Limited Warranty(Panel and Touch is only Warranty 1 Year)   |  |