




CARTFT.COM
Shop for mobile
PC- and GPS-Solutions

Jetway F35-ARU1-225U0020 3.5" SBC (Intel Core Ultra 5 225U, 2x LAN, 4 Displays) [12-36V Power Input]

[<http://www.cartft.com/catalog/il/3918>]

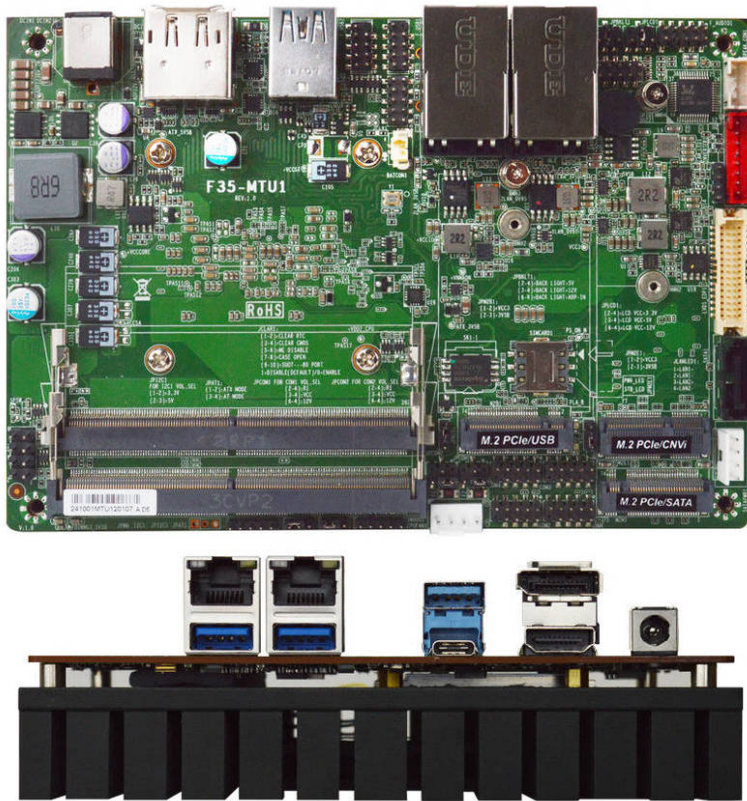

0.00 EUR

incl. 19% VAT, plus shipping

- Intel Core Ultra 5 225U !
- 4 Display Support !
- 2x 2.5GbE LAN !
- 12-36V DC Input !

- Powered by Intel® Core? Ultra 5 Processor 225U (Formerly Arrow Lake-U, TDP 15W) with integrated NPU for AI acceleration.
- High-Speed Memory: 2 x DDR5 6400MT/s dual-channel CSO-DIMM, up to 128GB.
- Supports four independent displays with resolutions up to 4K at 60Hz.
- Dual Intel® 2.5GbE LAN: Supports TSN, Redundancy, and high-speed connectivity.
- Storage and Expansion: 1 x SATA III, 1 x M.2 E-Key, 1 x M.2 M-Key, 1 x M.2 B-Key, 1 x Nano SIM slot, and RAID support.
- Comprehensive I/O: 1 x USB 3.2 Gen 2x2, 3 x USB 3.2 Gen 2, 4 x USB 2.0, and 4 x COM ports. (USB 3.2 Type-C co-layout DP)
- Wide-Range DC Input: 12-36V for industrial applications.

SYSTEM

MB FORM FACTOR

3.5"

CPU

Onboard Intel® Core? Ultra 5 Processor 225U (Formerly Arrow Lake-U, TDP 15W)

CHIPSET

Intel® SoC

MEMORY

2 x DDR5 6400MT/s, Dual Channel CSO-DIMM, up to 128GB

BIOS

UEFI

WAKE ON LAN

Yes

WATCHDOG TIMER

255 Levels

SECURITY	Intel® PTT (fTPM)
RTC BATTERY	Lithium Battery
DIMENSION (W X D)	148.0 (W) x 102.0 (D) mm (5.8" x 4.0")
OS SUPPORT	Windows® 11 (64bit) Windows® 10 (64bit) Linux
POWER	
POWER REQUIREMENT	DC-in 12~36V
POWER ON MODE	AT / ATX (Default) Mode
CONNECTOR	DC Jack
DISPLAY	
GPU	Intel® Graphics
LVDS	1 x 24-bit Dual Channel LVDS (Max. Resolution: 1920 x 1200 @60Hz, co-layout eDP)
Type-C DP	1 x Type-C DP1.4 (Max Resolution: 4096 x 2160@60Hz)
DP	1 x DP1.4 (Max Resolution: 3840 x 2160@60Hz)
HDMI®	1 x HDMI 2.0b (Max Resolution: 4096 x 2160@60Hz)
MULTIPLE DISPLAY	Support 4 Displays
AUDIO	
CODEC	Realtek Audio Codec
COMBO	1 x Internal Header
AMPLIFIER	3W
LAN	
ETHERNET	1 x RJ45 for Intel® I226-V 2.5GbE 1 x RJ45 for Intel® I226-LM 2.5GbE
USB PORT	
USB	1 x USB 3.2 Gen 2x2 Type-C (20Gbps) 3 x USB 3.2 Gen 2x1 (10Gbps, Formerly USB 3.1 Gen 2) Internal Header for 4 x USB 2.0
SERIAL PORT	
COM	Internal Header for 4 x RS-232/422/485
INTERNAL I/O	
GPIO	8-Bit
SMBUS	Yes
I2C	Yes
FAN	1 x 4-pin Connector for CPU Fan (PWM Mode)
FRONT PANEL	HDD Active LED Power LED Power On/Off Reset
ADDITIONAL	1 x Chassis intrusion 1 x AT/ATX Mode Selection
STORAGE	

SATA	1 x SATA III 1 x SATA Power Connector
RAID	RAID 0/1
EXPANSION	
M.2	1 x E-Key 2230 (USB 2.0/PCIe 3.0 x1) Support CNVio 1 x B-Key 3042/3052 (USB 3.2/PCIe 3.0 x2) 1 x M-Key 2242/2280 (PCIe 4.0 x4 / SATA III) Support NVMe
SIM	1 x Nano SIM Card Slot
ENVIRONMENT & CERTIFICATION	
OPERATING TEMPERATURE	-20°C ~ 60°C (-4°F ~ 140°F)
STORAGE TEMPERATURE	-20°C ~ 85°C (-4°F ~ 185°F)
OPERATING HUMIDITY	10 ~ 90% relative humidity, non-condensing
CERTIFICATION	CE/FCC Class A